eircom 9000C

corded telephone

User Guide

eircom

Dear customer,

Congratulations on buying your telephone and thank you for placing your confidence in us.

This device has been manufactured with the utmost care. If you should have difficulties in operating it, we recommend that you consult this user manual.

For further information please refer the helpdesk: 1850 60 20 60.

To operate the device safely and easily, please read the section carefully "**Recommendations and safety instructions"**, page 7.

CE The CE label confirms that the product complies with the 1999/5/EC regulations of the European Union Parliament regarding wireless systems and telecommunications.

The declaration of compliance may be looked up on the **www.sagemcom.com** website section «Support» or can be obtained from the following address:

Sagemcom Broadband SAS
250, route de l'Empereur - 92848 Rueil-Malmaison Cedex - France

Discover

Your pack

Make sure that the box contains the following items:

- the telephone base,
- the telephone set with its spiral cable,
- a phone connection cord,
- the user manual.

Your phone

The eircom 9000C is a compact, easy-to-use telephone. It will take up little space on your desk or can be fixed to a wall.

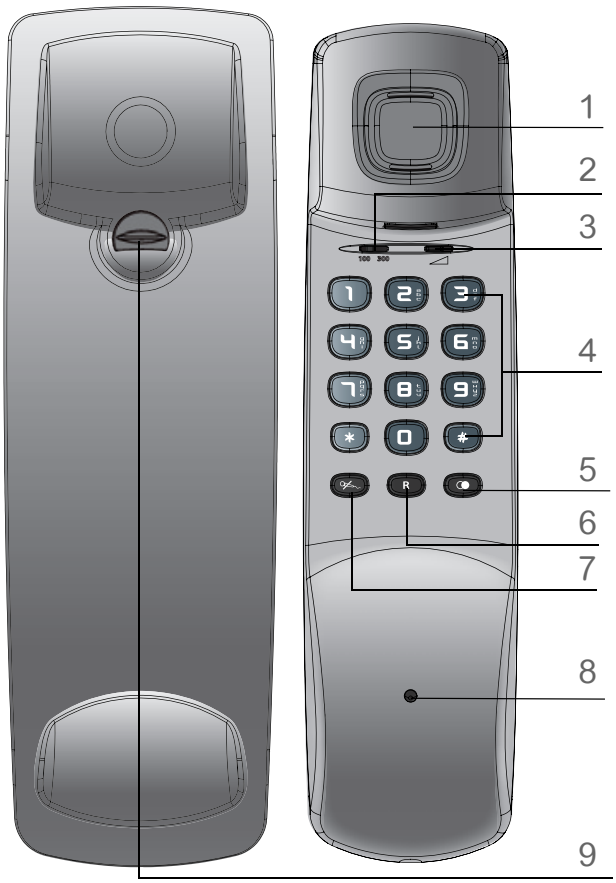

1. Earpiece.
2. 100 300 Key: modify the duration of the flash
3. Key: to change the listening volume.
4. Numerical keypad.
5. Key: last number redial.
6. R Key: Function button for accessing additional services (details from your telephone company).
7. Key: microphone on/off.
8. Microphone.
9. Wall mounting clip.

Installing the telephone

Connect the telephone cable

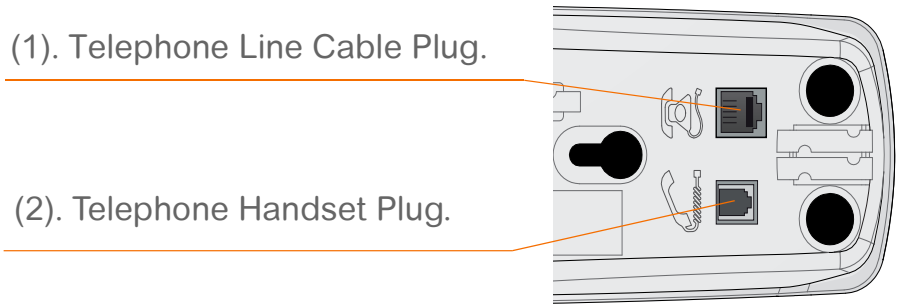

- Under the base, click the end of the spiral telephone cable into its housing (2).
- Click the end of the telephone line cable into its housing (1) and connect the other end to the phone line.

Wall-mounting your telephone

To fix your telephone to the wall, you will need two screws and two rawlplugs. These are not provided in the pack.

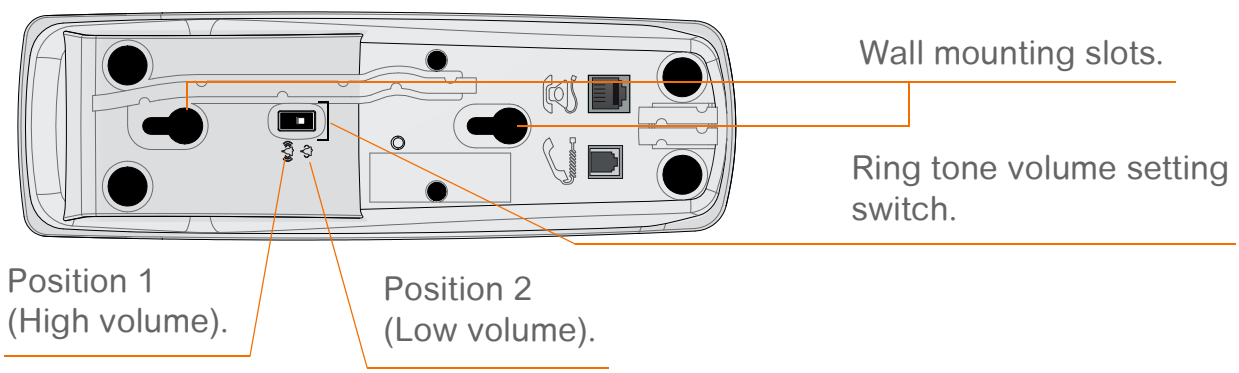

- Swivel the grip clip. This prevents the handset from falling off its base.

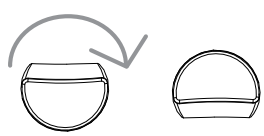

- Mark the wall at the two fixture points.
- Drill the wall at the marked points.
- Insert rawlplugs into the holes if necessary. Insert the screws into the rawlplugs.
- Fix the telephone to the wall, align the wall mounting slits with the screws in the wall, then firmly push the telephone into position.
- Place the telephone so that it holds securely and without danger.

Using your telephone

Receiving a call

The telephone rings. Pick up the handset from its base: you can talk to your caller.
At the end of the call, hang up the handset on its base. The telephone is ready to receive a call.

Making a call

Pick up the handset from its base: you should hear the dial tone.
Dial the number of your correspondent using the numerical keypad.
At the end of the call, hang up the handset on its base.

Redialing a number

Pick up the handset from its base: you should hear the dial tone.

Press button , the last number called is redialed automatically.

Managing calls (depending on the operator)

Receiving a second call while you are already on line

During a call, a sound beep is sent by your operator to inform you that a second call is waiting.

Press the key, then the key to take this new call.
Your first caller is placed on hold and you can speak to the second caller.

Making a second call while you are already on line

During a call, press the key and dial the number to call.
The ongoing call is placed on hold and you can talk to the second person you called.

Switching from one call to the other

To switch from one call to the other press the key and then the key.
The ongoing call is placed on hold and you can resume the second call.

Ending one of the two calls

To hang up one call and continue the other press the key, and then the key.
The current call is hung up and the other call comes back on line.

To hold a three-way conference (2 calls and yourself)

During the call, press the R key and then the 3 key.
You can now speak to both callers at the same time.
To end the three-way conference, hang up the phone.

Mute mode

During a call you can switch to mute mode: the microphone of your telephone is turned off. The other party can no longer hear you.

- **To switch to Mute mode:** During a call, press the key. The other party can no longer hear you and music is played.
- **To switch off Mute mode**: press the key again. The other party can hear you again.

Modify the duration of the flash ("R" Key)

If your phone is connected to a private exchange, or if you have a second call service (operator service), you may need to change the duration of the flash which is set at **100 milliseconds** by default (refer to "**Your phone**", page 2).

- **100 ms** : Use a pin to place the cursor at the 100 300 position.
- **300 ms** : Use a pin to place the cursor at the 100 300 position.

Adjusting the ring tone volume

The cursor is adjusted using the switch on the underside of the base (refer to "**Installing the telephone**", page 3).

- **Position 1** : the ring tone volume is high.
- **Position 2** : the ring tone volume is low.

Changing the listening volume

During a call you can change the listening volume using the key (refer to "**Your phone**", page 2).

- **Position 1** : the volume level is normal.
- **Position 2** : the volume level is high.

Characteristics

Support format	FSK / DTMF
Dialling type	Voice frequencies
Relative humidity (maximum)	-5°C to 55°C 20% to 75%
Storage temperature	-10°C to +60°C
Dimensions (l x L x h)	
- Handset :	210 x 45 x 39 mm
- Base :	215 x 67 x 50 mm
Weight	
- Handset :	140 g
- Base :	180 g

Guarantee

a) The eircom 9000C has a warranty of 12 months and is guaranteed to be free from defects in materials and workmanship during that period.

b) Should your eircom 9000C fail to function properly please call the helpdesk on 1850 60 20 60.

c) The product must have been used for the intended purpose and must not have been subjected to wilful or accidental damage.

d) In the case of new devices and their components exhibiting defects resulting from manufacturing and/ or material faults within 12 months of purchase, eircom shall, at its own option and free of charge, either replace the device with another device reflecting the current state of the art, or repair the said device.

e) This warranty does not cover damage caused by excessive voltage, lightning, liquid or faults on the telephone line. If the product or serial number has been tampered with in any way, any repairs attempted or non-rechargeable batteries found to be used the warranty shall be considered null and void.

f) This warranty does not affect your statutory rights.

For operational queries please call the helpdesk on 1850 60 20 60.

For queries relating to eircom services please call eircom on 1901.

Recommendations and safety instructions

Do not install your telephone in a damp environment, such as a bathroom, washroom, kitchen etc, and not within 1.50 metres of a source of water or outside. This device is designed for use in temperatures of between 5 °C and 35 °C.



Do not attempt to remove screws or open the appliance. It does not contain any user-replaceable parts.

This device is designed to be used for connecting to the public telephone network. If problems should arise, contact your nearest specialist dealer. Only use the telephone cable supplied.

In regions greatly affected by electrical storms we recommend that you protect your telephone circuit with a special fixture for excess voltage.

Your eircom 9000C has anti-skid pads that should leave no traces on your furniture and ensure stability. However, given the the wide variety of finishes used by furniture manufacturers, traces may appear on surfaces in contact with the parts of your eircom 9000C. eircom decline all responsibility in any such cases of damage.

Environmental information

Environmental impact

Electrical and electronic appliances are an integral part of our daily lives, but sooner or later they end up as waste.

WEEE disposed of to land ll, incinerated or recovered without any pre-treatment has the potential to cause serious consequences for the environment and human health.

You will nd a crossed out wheeled bin symbol on the base of the telephone. The symbol means that the equipment should not be disposed of with general household waste.

Play your part by -
Not disposing of this equipment with your general household waste.
Bringing this eircom phone or the product it replaced to your civil amenity site at end of life for recycling.
Post or deliver to:

eircom Recovered Engineers,
Central Warehouse,
Clondalkin Industrial Est.
Dublin 24.

There is no disposal charge for end of life equipment returned to eircom or deposited at civic amenity sites for collection by “WEEE Ireland” on behalf of eircom.
Reduce, Reuse, Recycle eircom working for the environment.

Irish Trade Mark Registration no. 213824
Registered of ce: eircom Limited,
1HSQ, St. John's Road, Dublin 8
Registered in Ireland No. 98789

253538201A